

(19) World Intellectual Property Organization International Bureau



(43) International Publication Date
13 January 2005 (13.01.2005)

PCT

(10) International Publication Number
WO 2005/004226 A1

(51) International Patent Classification⁷: H01L 21/68, 21/58

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(21) International Application Number: PCT/EP2004/007161

(22) International Filing Date: 1 July 2004 (01.07.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data: 0315623.9 3 July 2003 (03.07.2003) GB

(71) Applicant (for all designated States except US): XSIL TECHNOLOGY LIMITED [IE/IE]; Unit 3, Trinity Enterprise Centre, Pearse Street, Dublin 2 (IE).

(72) Inventors; and

(75) Inventors/Applicants (for US only): BOYLE, Adrian [IE/IE]; 9 Togher Grove, Monasterevin, County Kildare (IE). GILLEN, David [GB/IE]; 46 Vernon Heath, Clontarf, Dublin 3 (IE). FARSAARI, Maria [GR/GR]; 2nd Parodos Nik. Spathariou 5, 71307 Heraklion, Crete (GR).

(74) Agent: HARRISON GODDARD FOOTE; 40-43, Chancery Lane, London WC2A 1JA (GB).

Published:


- with international search report
- with amended claims

Date of publication of the amended claims: 3 March 2005

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: DIE BONDING

WO 2005/004226 A1

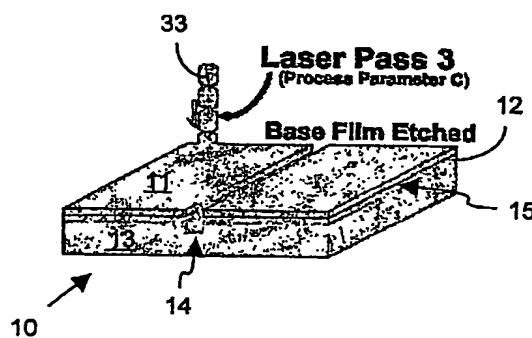

(57) Abstract: A die bonding method and apparatus by which a wafer substrate 11 adhered to a carrier tape 13 by an adhesive layer 12 is laser machined through the wafer substrate and through the adhesive layer at most to scribe the carrier tape to form a singulated die 15 with an attached singulated adhesive layer, without substantial delamination of the adhesive layer 12 and carrier tape 13 or substantial production of burrs from the adhesive layer 12. The carrier tape 13 is cured, preferably by ultraviolet light, to release the adhesive layer from the carrier tape. The singulated die is picked and placed on a die pad and the adhesive layer 12 is cured, preferably by heat, to adhere the die to the die pad.